

Performa™ Cv Control Valves

Pentair Water™ offers a full range of Autotrol™ Control Valves to meet a wide range of water conditioning applications.



742 Ti



742 Demand

742 Demand




Dimensions

Valve Connections

Tank Thread	2-1/2-inches – 8, male
Inlet/Outlet Threads	1-3/4-inches – 12 UNC-2A male
Drain Line	3/4-inch NPT, male
Brine Line	3/8-inch NPT, male
Distributor Tube Diameter	1.050 inches (27 mm)
Distributor Tube Length	1/2 ± 1/2-inches (13 ± 13 mm) above top of tank

Outline Dimensions

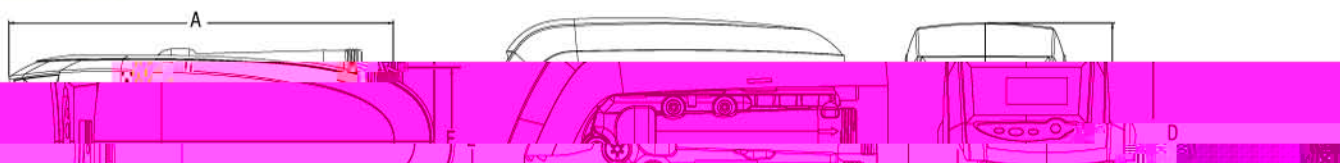


Only

Flow Rates (Values)

Flow Rates

Legit® Series Controller Flow Rate Characteristics


Backwash Flow Ca

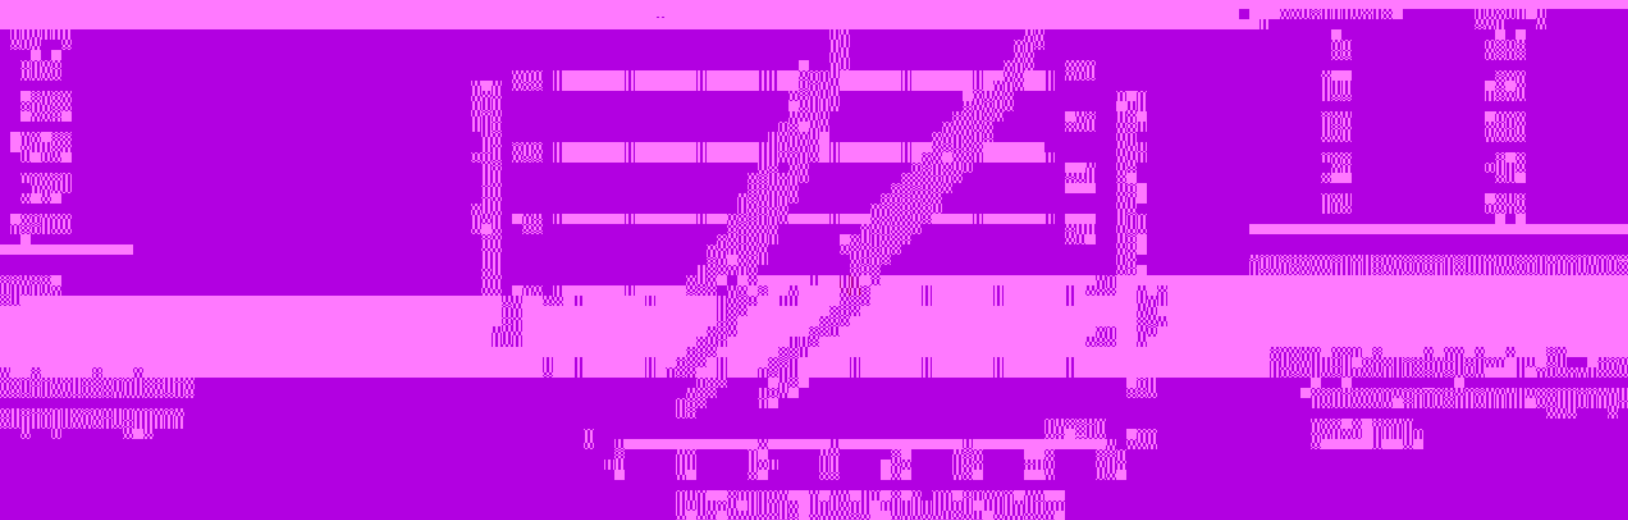







Injector* Performance

Logix™ Series Controllers

Injector "H" (Light Purple)
For 9-inch Tanks

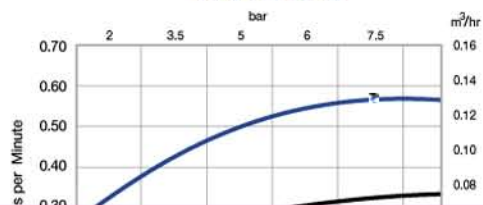

Injector "J" (Light Blue)
For 10-inch Tanks

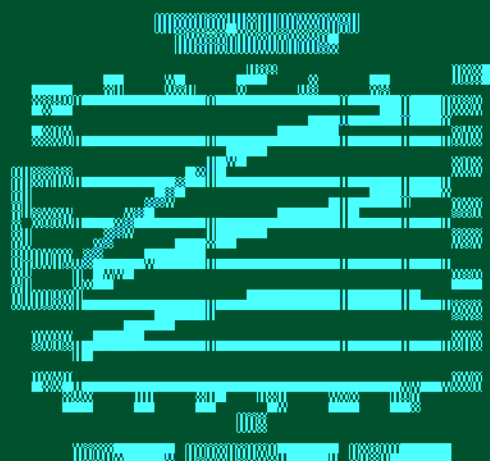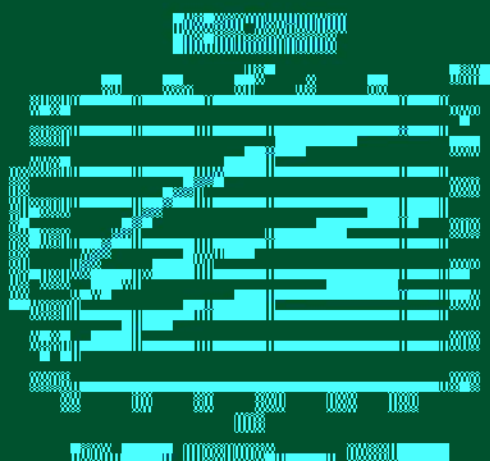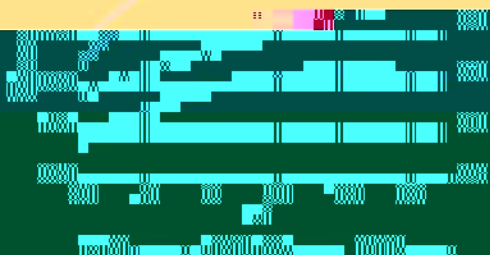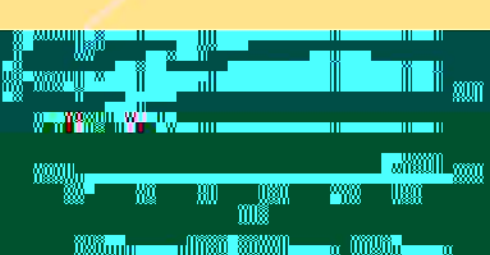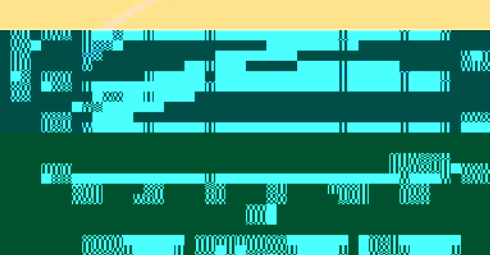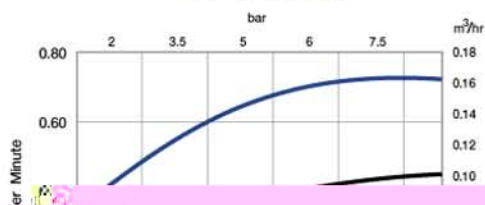

Logix™ Series Controllers

